



**netZero**usa®  
LED LIGHTING SOLUTIONS

## 2023 PRODUCT CATALOG

Revision 23.1



**n7LED**®  
AMERICAN ENGINEERED

**n7GUV**®  
GERMICIDAL LIGHTING

888.326.2220  
netzero-usa.com



<b>FLAT PANEL SERIES</b> .....	<b>1</b>	<b>FLOOD LIGHT SERIES</b> .....	<b>26</b>
RETROFITS .....	1	PRODUCTS .....	26
REPLACEMENTS / NEW CONSTRUCTION .....	2	<b>AREA LIGHT SERIES</b> .....	<b>27</b>
ACCESSORIES .....	3	PRODUCTS .....	27
<b>CENTER BASKET SERIES</b> .....	<b>4</b>	ACCESSORIES .....	29
RETROFITS .....	4	<b>CANOPY LIGHT SERIES</b> .....	<b>30</b>
REPLACEMENTS / NEW CONSTRUCTION .....	5	PRODUCTS .....	30
<b>LENSED RETROFIT STRIP KIT SERIES</b> .....	<b>6</b>	<b>WALL PACK SERIES</b> .....	<b>31</b>
PRODUCTS .....	6	PRODUCTS .....	31
ACCESSORIES .....	7	<b>COBB LIGHT SERIES</b> .....	<b>34</b>
<b>RETROFIT STRIP KIT SERIES</b> .....	<b>8</b>	PRODUCTS .....	34
PRODUCTS .....	8	<b>HID RETROFIT SERIES</b> .....	<b>36</b>
ACCESSORIES .....	11	PRODUCTS .....	36
<b>SHOP LIGHT SERIES</b> .....	<b>12</b>	<b>SENSORS / SWITCHES</b> .....	<b>38</b>
RETROFITS .....	12	PRODUCTS .....	38
REPLACEMENTS / NEW CONSTRUCTION .....	14	<b>POWER SERIES</b> .....	<b>39</b>
ACCESSORIES .....	15	SURGE SUPPRESSION .....	39
<b>HIGH BAY SERIES</b> .....	<b>16</b>	STEP DOWN TRANSFORMER.....	40
PRODUCTS .....	16	EMERGENCY BATTERY PACK.....	41
ACCESSORIES .....	18	<b>EGRESS SECURITY SERIES</b> .....	<b>42</b>
<b>UFO HIGH BAY SERIES</b> .....	<b>19</b>	PRODUCTS .....	42
PRODUCTS .....	19	<b>GERMICIDAL UV SERIES</b> .....	<b>43</b>
ACCESSORIES .....	20	UPPER-ROOM UNIT.....	43
<b>VAPOR TIGHT SERIES</b> .....	<b>21</b>	REPLACEMENT BULBS .....	44
PRODUCTS .....	21	<b>ADMINISTRATIVE</b> .....	<b>45</b>
<b>DOWN LIGHT SERIES</b> .....	<b>22</b>	CONTACTS.....	45
PRODUCTS .....	22		
ACCESSORIES .....	25		



**SERIES PRODUCTS**



	NZLED® 7225.1	NZLED® 7436.1	NZLED® 7125.1
Part Number	NZ-7225.1-QQ	NZ-7436.1-QQ	NZ-7125.1-QQ
Description	Dual 3-Way Switching 2' X 2' Retrofit Flat Panel	Dual 3-Way Switching 2' X 4' Retrofit Flat Panel	Dual 3-Way Switching 1' X 4' Retrofit Flat Panel
Type	Retrofit	Retrofit	Retrofit
Applications	Indoor Luminaires: 2x2 Troffer	Indoor Luminaires: 2x4 Troffer	Interior
CCT	Onboard 3-Way Switch: 3500K / 4000K / 5000K	Onboard 3-Way Switch: 3500K / 4000K / 5000K	Onboard 3-Way Switch: 3500K / 4000K / 5000K
Input Power	Onboard 3-Way Switch: 18W / 22W / 25W	Onboard 3-Way Switch: 23W / 30W / 36W	Onboard 3-Way Switch: 18W / 22W / 25W
Lumen Output	2358-2394 / 2816-2860 / 3125-3175	3013-3059 / 3840-3900 / 4500-4572	2358-2394 / 2816-2860 / 3125-3175
Certifications	DLC, UL 1598C	DLC, UL 1598C	DLC, UL 1598C
Dimensions	23.8"W x 23.9"H x 1.09"D	47.8"W x 23.9"H x 1.09"D	47.8"W x 11.9"H x 1.09"D
Driver	NZUSA External	NZUSA External	NZUSA External
Grounded	YES	YES	YES
Housing Color	White	White	White
Warranty	7 Years	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 113°F	-4°F TO 113°F	-4°F TO 113°F
IP Rating	IP40	IP40	IP40
0-10V Dimmable	YES	YES	YES
User-Tunable	Dual Switching: CCT, Input Power	Dual Switching: CCT, Input Power	Dual Switching: CCT, Input Power
Controls Compatible	YES	YES	YES
Dark Sky Compliant	-	-	-
Accessories	-	-	-
Options	-	-	-
Ordering Notes	-	-	-

**CERTIFICATIONS**

	NZLED® 7225.1	NZLED® 7436.1	NZLED® 7125.1
DLC Model No.	NZ-7225.1-QQ	NZ-7436.1-QQ	NZ-7125.1-QQ
DLC ID	PLYP4Y6IHXTZ	PL1ZNP76RJSB	S-XYWFD0
UL No.	E491844	E491844	E491844



**SERIES PRODUCTS**



	NZLED <sup>®</sup> 8240.2	NZLED <sup>®</sup> 8450.2	NZLED <sup>®</sup> 8140.2
Part Number	NZ-8240.2	NZ-8450.2	NZ-8140.2-R
Description	Dual 3-Way Switching 2' X 2' Standard Flat Panel	Dual 3-Way Switching 2' X 4' Standard Flat Panel	Dual 3-Way Switching 1' X 4' Standard Flat Panel
Type	Replacement / New Construction	Replacement / New Construction	Replacement / New Construction
Applications	Indoor Luminaires: 2x2 Troffer	Indoor Luminaires: 2x4 Troffer	Indoor Luminaires: 1x4 Troffer
CCT	3500K / 4000K / 5000K	3500K / 4000K / 5000K	3500K / 4000K / 5000K
Input Power	25W / 30W / 40W	30W / 40W / 50W	20W / 30W / 40W
Lumen Output	3000-3050 / 3510-3570 / 4400-4480	3630-3690 / 4680-4760 / 5550-5650	2800 / 4200 / 5600
Certifications	DLC, UL 1598C	DLC, UL 1598C	DLC, UL 1598C
Dimensions	23.7"W x 23.7"H x 1.09"D	47.72"W x 23.7"H x 1.09"D	47.72"W x 11.9"H x 1.09"D
Driver	NZUSA External	NZUSA External	NZUSA External
Grounded	YES	YES	YES
Housing Color	White	White	White
Warranty	7 Years	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 113°F	-4°F TO 113°F	-4°F TO 113°F
IP Rating	IP40	IP40	IP20
0-10V Dimmable	YES	YES	YES
User-Tunable	Dual Switching: CCT, Input Power	Dual Switching: CCT, Input Power	Dual Switching: CCT, Input Power
Controls Compatible	YES	YES	YES
Dark Sky Compliant	-	-	-
Accessories	8240PM, 8240SM	8450PM, 8450SM	-
Options	Factory-installed BBU, PN 8240.2-EM	Factory-installed BBU, PN 8450.2-EM	-
Ordering Notes	-	-	-


**CERTIFICATIONS**

	NZLED <sup>®</sup> 8240.2	NZLED <sup>®</sup> 8450.2	NZLED <sup>®</sup> 8140.2
DLC Model No.	NZ-8240.2+(Blank or -EM)	NZ-8450.2+(Blank or -EM)	NZ-8140.2-R
DLC ID	S-SDTULB	S-J7F8Q5	REGISTERED
UL No.	E491844	E491844	E491844



SERIES ACCESSORIES

ACC 8240-SM



ACC 8450-SM



Part Number	8240.2SM	8450.2SM
Description	2' X 2' Flat Panel Surface Mount	2' X 4' Flat Panel Surface Mount
Fits Products	8240.2	8450.2
Ordering Notes	-	-





**SERIES PRODUCTS**

NZLED<sup>®</sup> 1230.1



NZLED<sup>®</sup> 1434.1




	NZLED <sup>®</sup> 1230.1	NZLED <sup>®</sup> 1434.1
Part Number	NZ-1230.1-QQ	NZ-1434.1-QQ
Description	Dual 3-Way Switching 2' X 2' Retrofit Center Basket	Dual 3-Way Switching 2' X 4' Retrofit Center Basket
Type	Retrofit	Retrofit
Applications	Indoor Luminaires: 2x2 Troffer	Indoor Luminaires: 2x4 Troffer
CCT	Onboard 3-Way Switch: 3500K / 4000K / 5000K	Onboard 3-Way Switch: 3500K / 4000K / 5000K
Input Power	Onboard 3-Way Switch: 20W / 25W / 30W	Onboard 3-Way Switch: 25W / 30W / 34W
Lumen Output	2660-2700 / 3250-3300 / 3810-3870	3375-3425 / 3960-4020 / 4386-4454
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	23.8" x 23.9"	47.88" x 23.9"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	White	White
Warranty	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC120-277V	AC120-277V
Operating Temp.	-4°F TO 122°F	-4°F TO 122°F
IP Rating	IP60	IP60
0-10V Dimmable	YES	YES
User-Tunable	Dual Switching: CCT, Input Power	Dual Switching: CCT, Input Power
Controls Compatible	YES	YES
Dark Sky Compliant	-	-
Accessories	-	-
Options	-	-
Ordering Notes	-	-

**CERTIFICATIONS**

	NZLED <sup>®</sup> 1230.1	NZLED <sup>®</sup> 1434.1
DLC Model No.	NZ-1230.1-QQ+(Blank or -EM)	NZ-1434.1-QQ+(Blank or -EM)
DLC ID	PLE81EVJQJ40	PLACSM4F40T4
UL No.	E491905	E491905



**SERIES PRODUCTS**

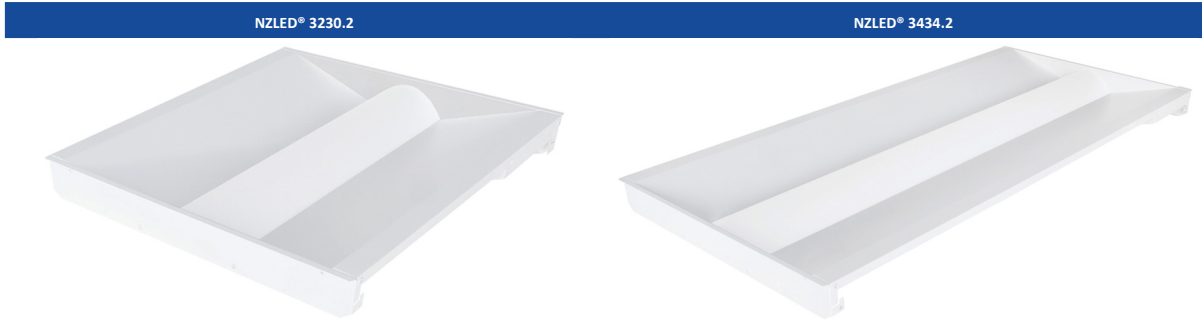

	NZLED® 3230.2	NZLED® 3434.2
Part Number	NZ-3230.2-QQ	NZ-3434.2-QQ
Description	Dual 3-Way Switching 2' X 2' Standard Center Basket	Dual 3-Way Switching 2' X 4' Standard Center Basket
Type	Replacement / New Construction	Replacement / New Construction
Applications	Indoor Luminaires: 2x2 Troffer	Indoor Luminaires: 2x4 Troffer
CCT	Onboard 3-Way Switch: 3500K / 4000K / 5000K	Onboard 3-Way Switch: 3500K / 4000K / 5000K
Input Power	Onboard 3-Way Switch: 20W / 25W / 30W	Onboard 3-Way Switch: 25W / 30W / 34W
Lumen Output	2500-2540 / 3125-3175 / 3750-3810	3125-3175 / 3750-3810 / 4250-4318
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	23.8" x 23.8"	47.8" x 23.8"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	White	White
Warranty	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC120-277V	AC120-277V
Operating Temp.	-4°F TO 122°F	-4°F TO 122°F
IP Rating	IP60	IP60
0-10V Dimmable	YES	YES
User-Tunable	Dual Switching: CCT, Input Power	Dual Switching: CCT, Input Power
Controls Compatible	YES	YES
Dark Sky Compliant	-	-
Accessories	-	-
Options	-	-
Ordering Notes	-	-

**CERTIFICATIONS**

	NZLED® 3230.2	NZLED® 3434.2
DLC Model No.	NZ-3230.2-QQ	NZ-3434.2-QQ
DLC ID	PLXE62XUMNK5	PLYTOZIEQVAF
UL No.	E491844	E491844



**SERIES PRODUCTS**



	NZLED <sup>®</sup> 0327	NZLED <sup>®</sup> 0347	NZLED <sup>®</sup> 0447
Part Number	0327	0347	0447
Description	30W 2' Lensed Retrofit Strip Kit	30W 4' Lensed Retrofit Strip Kit	40W 4' Lensed Retrofit Strip Kit
Type	Magnetic Retrofit	Magnetic Retrofit	Magnetic Retrofit
Applications	2x2 Interior	2x4 Interior	2x4 Interior
CCT	4000K, 5000K	4000K, 5000K	4000K, 5000K
Input Power	30W	30W	40W
Lumen Output	3166	3462	4580
Certifications	DLC, ETL	DLC, ETL	DLC, ETL
Dimensions	24"	48"	48"
Driver	NZUSA External	NZUSA External	NZUSA External
Grounded	YES	YES	YES
Housing Color	-	-	-
Warranty	7 Years	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V	AC100-277V
Operating Temp.	23°F TO 122°F	23°F TO 122°F	23°F TO 122°F
IP Rating	IP64 (Driver only)	IP64 (Driver only)	IP64 (Driver only)
0-10V Dimmable	YES	YES	YES
User-Tunable	-	-	-
Controls Compatible	YES	YES	YES
Dark Sky Compliant	-	-	-
Accessories	0302, 0304, 0034	0302, 0304, 0036	0302, 0304, 0038
Options	-	-	Inboard / Outboard driver option available.
Ordering Notes	Specify desired CCT at time of order.	Specify desired CCT at time of order.	Specify desired CCT at time of order.

**CERTIFICATIONS**

	NZLED <sup>®</sup> 0327	NZLED <sup>®</sup> 0347	NZLED <sup>®</sup> 0447
DLC Model No.	NZ-LT-2*2-2-230-X2Y1	NZ-LT-2*4-4-230-X2Y1	NZ-LT-2*4-4-240-X2Y1
DLC ID	PNZVH268, PRZANK61	PZPQ46N9, P5EJ7CN1	PSEKFXNQ, PY2DWB6B
ETL No.	5006786	5006786	5006786





SERIES ACCESSORIES

	ACC 0302-4/5	ACC 0304-4/5	ACC 0031, 0032, 0033, 0034
			
Part Number	0302-4/5	0304-4/5	0032, 0033, 0034
Description	2' Lensed Retrofit Single Strip Adder	4' Lensed Retrofit Single Strip Adder	2, 3, or 4 Leg Whip Connector
Fits Products	0327, 0347, 0447	0327, 0347, 0447	0327, 0347, 0447
Ordering Notes	Specify desired CCT at time of order.	Specify desired CCT at time of order.	Specify whip count at time of order.



SERIES PRODUCTS



	NZLED <sup>®</sup> 9822	NZLED <sup>®</sup> 9834
Part Number	9822	9834
Description	20W Strip Kit	30W Strip Kit
Type	Retrofit	Retrofit
Applications	2x2, 2x4 Interior	2x2, 2x4 Interior
CCT	3500K, 5000K	3500K, 5000K
Input Power	20W	30W
Lumen Output	2044-2814	2814-3318
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	24"	24"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	-	-
Warranty	10 Years	10 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	23°F TO 122°F	23°F TO 122°F
IP Rating	IP67 (Driver only)	IP67 (Driver only)
0-10V Dimmable	-	-
User-Tunable	-	-
Controls Compatible	YES	YES
Dark Sky Compliant	-	-
Accessories	9290, 9291, 9292, 9293, 9294	9290, 9291, 9292, 9293, 9294
Options	-	-
Ordering Notes	-	-

CERTIFICATIONS

	NZLED <sup>®</sup> 9822	NZLED <sup>®</sup> 9834
DLC Model No.	NZ-20-9822	NZ-30-9834
DLC ID	PHFTW2FV, P5S9H5HF, P9CTAH9U, P4PZEJG7, P93PSW6R, P9EYAVNT	PVBK7AS2, PU9XBN4T, PX3SW142, P44CECXZ, PM4SFB1R, P9XAP1X6, PFXMZ57Q
UL No.	E466556	E466556



SERIES PRODUCTS




	NZLED <sup>®</sup> 9844	NZLED <sup>®</sup> 9844-D
Part Number	9844	9844D
Description	40W Strip Kit	40W Strip Kit Dimmable
Type	Retrofit	Retrofit
Applications	2x2, 2x4 Interior	2x2, 2x4 Interior
CCT	3500K, 5000K	3500K, 5000K
Input Power	40W	40W
Lumen Output	3432-4544	4202-4454
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	24"	24"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	-	-
Warranty	10 Years	10 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	23°F TO 122°F	23°F TO 122°F
IP Rating	IP67 (Driver only)	IP67 (Driver only)
0-10V Dimmable	-	YES
User-Tunable	-	-
Controls Compatible	YES	YES
Dark Sky Compliant	-	-
Accessories	9290, 9291, 9292, 9293, 9295	9290, 9291, 9292, 9293, 9296
Options	-	-
Ordering Notes	-	-

CERTIFICATIONS

	NZLED <sup>®</sup> 9844	NZLED <sup>®</sup> 9844-D
DLC Model No.	NZ-40-9844	NZ-40D-9844
DLC ID	PA4WF3B4, PSZMC5UQ, P9F57K2K, P1VNQFKS, PWMYYMRA, P3PWM45, PAM6XH5X, P7YD7HJF, PPSHXHXJ	PQ3FTUJ8, PXUJECXA, PQZAJNVA
UL No.	E466556	E466556



SERIES PRODUCTS

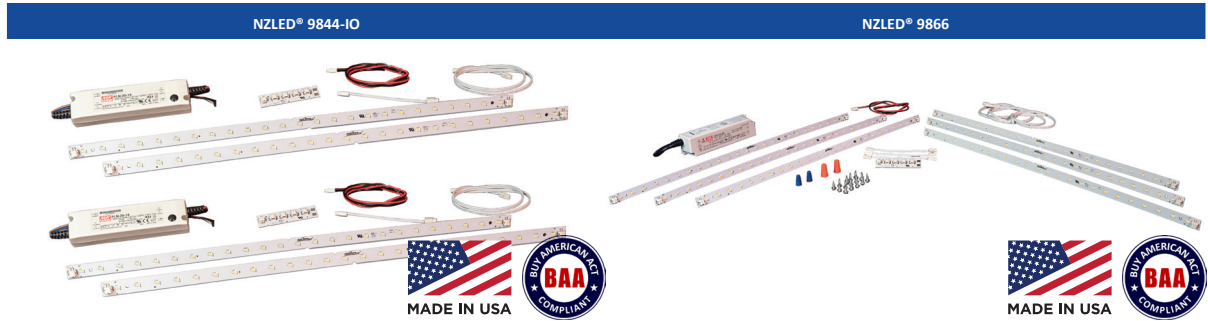




	NZLED <sup>®</sup> 9844-IO	NZLED <sup>®</sup> 9866
Part Number	9844I/O	9866
Description	40W Strip Kit In/Outboard	60W Strip Kit (6 Strip)
Type	Retrofit	Retrofit
Applications	2x2, 2x4 Interior	2x2, 2x4 Interior
CCT	3500K, 5000K	3500K, 5000K
Input Power	40W	60W
Lumen Output	4120-4280	6241-6615
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	24"	24"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	-	-
Warranty	10 Years	10 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	23°F TO 122°F	23°F TO 122°F
IP Rating	IP67 (Driver only)	IP67 (Driver only)
0-10V Dimmable	-	-
User-Tunable	-	-
Controls Compatible	YES	YES
Dark Sky Compliant	-	-
Accessories	9290, 9291, 9292, 9293, 9297	9290, 9291, 9292, 9293, 9298
Options	-	Product available in 8-strip configuration, Part No. 9868
Ordering Notes	Product will be shipped as (2) 9822 kits.	-



CERTIFICATIONS

	NZLED <sup>®</sup> 9844-IO	NZLED <sup>®</sup> 9866
DLC Model No.	*Use 9822 (x2)	NZ-60-9866
DLC ID	*Use 9822 (x2)	PJRX1GYC, PZVYSJEU, PHGC8S49
UL No.	E466556	E466556




SERIES ACCESSORIES

	ACC 9290	ACC 9291	ACC 9292
			
Part Number	9290	9291	9292
Description	46.5' Strip Kit Curved Diffuser	2 Strip Adder	2' X 4' Strip Kit Diffuser
Fits Products	9834, 9844, 9844-D, 9844-IO, 9866, 9868	9834, 9844, 9844-D, 9844-IO, 9866, 9869	9834, 9844, 9844-D, 9844-IO, 9866, 9870
Ordering Notes	-	Available in 3500K, 5000K	-

	ACC 9293	ACC 9294
		
Part Number	9293	9294
Description	Strip Kit Switch Base	Strip Kit Parts Kit
Fits Products	9834, 9844, 9844-D, 9844-IO, 9866, 9871	9834, 9844, 9844-D, 9844-IO, 9866, 9872
Ordering Notes	-	-



**SERIES PRODUCTS**

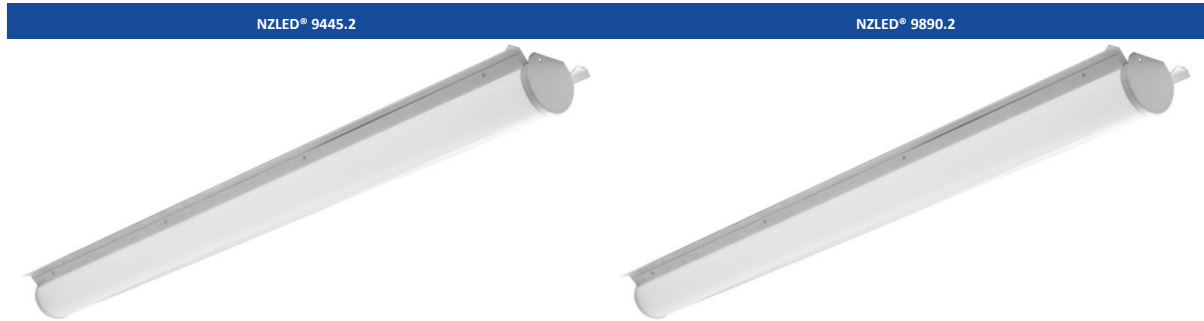

	NZLED® 9445.2	NZLED® 9890.2
Part Number	NZ-9445.2-QQ	NZ-9890.2-QQ
Description	Dual 3-Way Switching 4' Retrofit Shop Light	Dual 3-Way Switching 8' Retrofit Shop Light
Type	Retrofit	Retrofit
Applications	4' Linear Interior	8' Linear Interior
CCT	3500 / 4000 / 5000K	3500 / 4000 / 5000K
Input Power	34W / 38W / 45W	65W / 75W / 90W
Lumen Output	4624-5940	8840-11,880
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	48.35" x 5.76" x 2.36"	96.7" x 5.76" x 2.36"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	White	White
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC120-277V	AC120-277V
Operating Temp.	-4°F TO 122°F	-4°F TO 122°F
IP Rating	IP61	IP61
0-10V Dimmable	YES	YES
User-Tunable	-	-
Controls Compatible	YES	YES
Dark Sky Compliant	-	-
Accessories	-	-
Options	-	-
Ordering Notes	-	-

**CERTIFICATIONS**

	NZLED® 9445.2	NZLED® 9890.2
DLC Model No.	NZ-9445-QQ	NZ-9890-QQ
DLC ID	PL64P444TOXB	PL0DC8G4MFRL
UL No.	E491905	E491906





**SERIES PRODUCTS**



	NZLED <sup>®</sup> 9432	NZLED <sup>®</sup> 9865
Part Number	NZ-9432	NZ-9865
Description	32W 4' Retrofit Shop Light	65W 8' Retrofit Shop Light
Type	Retrofit	Retrofit
Applications	4' Linear Interior	8' Linear Interior
CCT	5000K	5000K
Input Power	32W	65W
Lumen Output	4288	8580
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	48.35" x 5.76" x 2.36"	96.7" x 5.76" x 2.36"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	White	White
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC120-277V	AC120-277V
Operating Temp.	-4°F TO 122°F	-4°F TO 122°F
IP Rating	IP61	IP61
0-10V Dimmable	YES	YES
User-Tunable	-	-
Controls Compatible	YES	YES
Dark Sky Compliant	-	-
Accessories	-	-
Options	-	-
Ordering Notes	-	-

**CERTIFICATIONS**

	NZLED <sup>®</sup> 9432	NZLED <sup>®</sup> 9865
DLC Model No.	NZ 9432 5000 Y	NZ 9865 5000 Y
DLC ID	PL36YF6URFZY	PLNDYPKCMXX5
UL No.	E491905	E491906



**SERIES PRODUCTS**



	NZLED <sup>®</sup> 9445NC.2	NZLED <sup>®</sup> 9890NC.2
Part Number	NZ-9445NC.2-QQ	NZ-9890NC.2-QQ
Description	Dual 3-Way Switching 4' New Construction Shop Light	Dual 3-Way Switching 8' New Construction Shop Light
Type	New Construction	New Construction
Applications	4' Linear Interior	8' Linear Interior
CCT	3500 / 4000 / 5000K	3500 / 4000 / 5000K
Input Power	34W / 38W / 45W	65W / 75W / 90W
Lumen Output	4420 / 4940 / 5850	8840-11,880
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	47.32" x 2.83" x 2.52"	94.17" x 2.83" x 2.52"
Driver	NZUSA	NZUSA
Grounded	YES	YES
Housing Color	White	White
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC120-277V	AC120-277V
Operating Temp.	-4°F TO 122°F	-4°F TO 122°F
IP Rating	IP20	IP20
0-10V Dimmable	YES	YES
User-Tunable	YES	YES
Controls Compatible	YES	YES
Dark Sky Compliant	-	-
Accessories	9000NC-LK, 9000NC-WC	9000NC-LK, 9000NC-WC
Options	-	-
Ordering Notes	-	-

**CERTIFICATIONS**

	NZLED <sup>®</sup> 9445NC.2	NZLED <sup>®</sup> 9890NC.2
DLC Model No.	NZ-9445NC.2-QQ	NZ-9890NC.2-QQ
DLC ID	S-OH3G1T	S-DONLGX
UL No.	E498108	E498108



SERIES ACCESSORIES

ACC 9000NC-LK

ACC 9000NC-WC

Photo Coming Soon

Photo Coming Soon

Part Number	9000NC-LK	9000NC-WC
Description	Shop Light Linkage Kit	Shop Light Wire Care
Fits Products	9445NC.2, 9890NC.2	9445NC.2, 9890NC.2
Ordering Notes	-	-



**SERIES PRODUCTS**



	NZLED <sup>®</sup> 9081	NZLED <sup>®</sup> 9110.4	NZLED <sup>®</sup> 9160.4
Part Number	NZ-9080.43	NZ-9110.4	NZ-9160.4
Description	80W Low Bay	105W Mid Bay	155W Mid / High Bay
Type	Replacement	Replacement	Replacement
Applications	Low Bay Interior	Mid Bay Interior	Mid/High Bay Interior
CCT	5000K	5000K	5000K
Input Power	80W	105W	155W
Lumen Output	10113	13755	21222
Certifications	DLC, UL 1598C	DLC, UL 1598C	DLC, UL 1598C
Dimensions	23.82" x 12.6" x 2.2"	24.8" x 14.96" x 2.16"	24.8" x 14.96" x 2.16"
Driver	NZUSA External	NZUSA External	NZUSA External
Grounded	YES	YES	YES
Housing Color	White	White	White
Warranty	7 Years	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours	>100K Hours
Input Voltage	AC120-277V	AC120-277V	AC120-277V
Operating Temp.	-4°F TO 104°F	-4°F TO 104°F	-4°F TO 104°F
IP Rating	IP61	IP61	IP61
0-10V Dimmable	YES	YES	YES
User-Tunable	-	-	-
Controls Compatible	YES	YES	YES
Dark Sky Compliant	-	-	-
Accessories	9081-WC, 9000-PM	9110-FM, 9110-WC, 9000-PM	9160-FM, 9160-WC, 9000-PM
Options	-	-	-
Ordering Notes	-	-	-

**CERTIFICATIONS**

	NZLED <sup>®</sup> 9081	NZLED <sup>®</sup> 9110.4	NZLED <sup>®</sup> 9160.4
DLC Model No.	NZ-9080.43 5000K	NZ-9110.4 5000Y	NZ-9160.4 5000Y
DLC ID	PMPDZ5P	PLMG8V0FWA80	PLJUDE5NEXKN
UL No.	E498108	E498108	E498108



**SERIES PRODUCTS**

NZLED<sup>®</sup> 9220-S.5



NZLED<sup>®</sup> 9321.4



	NZLED <sup>®</sup> 9220-S.5	NZLED <sup>®</sup> 9321.4
Part Number	NZ-9220.5 5000 Y	NZ-9321.4
Description	210W High Bay (Center-Mount OCC Sensor Compatible)	300W High Bay
Type	Replacement	Replacement
Applications	High Bay Interior	High Bay Interior
CCT	5000K	5000K
Input Power	210W	300W
Lumen Output	28560	33600
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	24.8" x 18.9" x 2.1"	46.5" x 14.96" x 2.16"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	White	White
Warranty	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC120-277V	AC120-277V
Operating Temp.	-4°F TO 104°F	-4°F TO 104°F
IP Rating	IP61	IP61
0-10V Dimmable	YES	YES
User-Tunable	-	-
Controls Compatible	YES	YES
Dark Sky Compliant	-	-
Accessories	9220-FM, 9220-WC, 9000-PM, 9000-S.5-OS, 9000-S.5-R	9321-FM, 9321-WC, 9000-PM
Options	Center-mount occupancy sensor w/mounting bracket and remote.	-
Ordering Notes	OCC Sensor with mounting bracket and Sensor Remote available separately.	-

**CERTIFICATIONS**

	NZLED <sup>®</sup> 9220-S.5	NZLED <sup>®</sup> 9321.4
DLC Model No.	NZ-9220.5 5000 Y	NZ-9321.4 5000Y
DLC ID	S-DHKLSN	PL101ZXAGN1Y
UL No.	E498108	E498108



**SERIES ACCESSORIES**

	ACC 9000.3-PM	ACC 9000.3-SMK	ACC 9081/9110/9160/9220/9321-WC
Part Number	9000.3-PM	9000.3-SMK	9081/9110/9160/9220/9321-WC
Description	Universal High Bay Pendant Mount	Universal High Bay Surface Mount	Low & High Bay Wire Cages
Fits Products	9110, 9160.3, 9220.4, 9321.4	ALL	ALL
Ordering Notes	-	-	-

	ACC 9081-PM	ACC 9000.3/4-OS
Part Number	9081-PM	9000.3/4-OS
Description	80W Low Bay Pendant Mount	Universal High Bay Occ Sensor
Fits Products	9081	ALL
Ordering Notes	-	-

	ACC 9000-S.5-OS	ACC 9000-S.5-R
Part Number	9000-S.5-OS	9000-S.5-R
Description	Center-Mounted OCC Sensor w/Bracket	OCC Sensor Remote
Fits Products	9220-S.5	9220-S.5
Ordering Notes	-	-





**SERIES PRODUCTS**






	NZLED® U100.1	NZLED® U150.1	NZLED® U200.1
Part Number	NZ-U100.1	NZ-U150.1	NZ-U200.1
Description	100W UFO High Bay	150W UFO High Bay	200W UFO High Bay
Type	Replacement	Replacement	Replacement
Applications	Mid Bay Interior	Mid Bay Interior	Mid/High Bay Interior
CCT	5000K	5000K	5000K
Input Power	100W	150W	200W
Lumen Output	14000	21000	28000
Certifications	DLC, UL 1598C	DLC, UL 1598C	DLC, UL 1598C
Dimensions	11.81" x 11.81" x 6.42"	11.81" x 11.81" x 6.42"	14.17" x 14.17" x 6.77"
Driver	NZUSA	NZUSA	NZUSA
Grounded	YES	YES	YES
Housing Color	Black	Black	Black
Warranty	7 Years	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours	>100K Hours
Input Voltage	AC120-277V	AC120-277V	AC120-277V
Operating Temp.	-40°F TO 122°F	-40°F TO 122°F	-40°F TO 122°F
IP Rating	IP65	IP65	IP65
0-10V Dimmable	YES	YES	YES
User-Tunable	-	-	-
Controls Compatible	YES	YES	YES
Dark Sky Compliant	-	-	-
Accessories	-	-	-
Options	Occupancy Sensor by special order	Occupancy Sensor by special order	Occupancy Sensor by special order
Ordering Notes	-	-	-

**CERTIFICATIONS**

	NZLED® U100.1	NZLED® U150.1	NZLED® U200.1
DLC Model No.	REGISTERED	REGISTERED	REGISTERED
DLC ID	REGISTERED	REGISTERED	REGISTERED
UL No.	E498108	E498108	E498108



SERIES ACCESSORIES

	ACC U100-WC	ACC U150-WC	ACC U200-WC
			
Part Number	U100-WC	U150-WC	U200-WC
Description	100W UFO High Bay Wire Cage	150W UFO High Bay Wire Cage	200W UFO High Bay Wire Cage
Fits Products	U100.1	U150.1	U200.1
Ordering Notes	-	-	-

	ACC U000-OS	ACC U000-R
		
Part Number	U000-OS	U000-R
Description	UFO High Bay OCC Sensor	UFO High Bay OCC Sensor Remote
Fits Products	All	ALL
Ordering Notes	-	-



**SERIES PRODUCTS**



	NZLED® 3364-C	NZLED® 3454.2
Part Number	TP-4FT-36-DNA	NZ-3454.2-QQ
Description	36W 4' Vapor Tight	Dual 3-Way Switching 4' Vapor Tight
Type	Replacement	Replacement
Applications	Linear Interior	Linear Interior/Exterior
CCT	5000K	Onboard 3-Way Switch: 3500K / 4000K / 5000K
Input Power	36W	Onboard 3-Way Switch: 38W / 45W / 52W
Lumen Output	4524.48	4940 - 6760
Certifications	DLC, UL1598C	DLC, UL1598C
Dimensions	47.24" x 3.7" x 2.36"	47.2" x 3.5" x 3.1"
Driver	NZUSA Internal	NZUSA Internal
Grounded	YES	YES
Housing Color	White	White
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC90-305V	AC120-277V
Operating Temp.	-13°F TO 104°F	-13°F TO 104°F
IP Rating	IP61	UL 1598 suitable for wet locations
0-10V Dimmable	YES	YES
User-Tunable	-	-
Controls Compatible	YES	YES
Dark Sky Compliant	-	-
Accessories	-	-
Options	-	-
Ordering Notes	-	-

**CERTIFICATIONS**

	NZLED® 3364-C	NZLED® 3454.2
DLC Model No.	NZ-336450K-D	NZ-3454.2-QQ
DLC ID	PRUPM4ZE	S-SIQBLD
UL No.	E498108	E498108



**SERIES PRODUCTS**

NZLED<sup>®</sup> 6166.3



NZLED<sup>®</sup> 6228.3



	NZLED <sup>®</sup> 6166.3	NZLED <sup>®</sup> 6228.3
Part Number	NZ-6166.3	NZ-6228.3
Description	Dual 3-Way Switching 6" Downlight	Dual 3-Way Switching 8" Downlight
Type	Retrofit	Retrofit
Applications	Indoor Luminaires	Indoor Luminaires
CCT	Onboard 3-Way Switch: 3000K / 4000K / 5000K	Onboard 3-Way Switch: 3000K / 4000K / 5000K
Input Power	Onboard 3-Way Switch: 8W / 12W / 16W	Onboard 3-Way Switch: 12W / 16W / 22W
Lumen Output	~800-1600	~1200-2200
Certifications	Energy Star, ETL	Energy Star, ETL
Dimensions	8-5/16" x 4-3/8"	10-5/16" x 4-7/8"
Driver	NZUSA	NZUSA
Grounded	YES	YES
Housing Color	White	White
Warranty	<b>5 Years</b>	<b>5 Years</b>
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	120-277VAC	120-277VAC
Operating Temp.	-20°C ~65°C	-20°C ~65°C
IP Rating	Wet Locations (UL 1598)	Wet Locations (UL 1598)
0-10V Dimmable	0-10V	0-10V
User-Tunable	CCT, Input Power	CCT, Input Power
Controls Compatible	-	-
Dark Sky Compliant	YES	YES
Accessories	6" Goof Ring, 6000-R6	8" Goof Ring, 6000-R8
Options	-	-
Ordering Notes	-	-

**CERTIFICATIONS**

	NZLED <sup>®</sup> 6166.3	NZLED <sup>®</sup> 6228.3
ETL No.	5006786	5006786
Energy Star No.	2389650	2389658



**SERIES PRODUCTS**

**NZLED<sup>®</sup> 6158.2**



Part Number	6158.2
Description	15W 8" Down Light
Type	Retrofit
Applications	8 Inch Interior
CCT	4000K
Input Power	15W
Lumen Output	1230
Certifications	Energy Star, UL 1598C
Dimensions	9.2" x 6.05"
Driver	NZUSA External
Grounded	YES
Housing Color	Silver
Warranty	5 Years
L70 Lifetime	>100K Hours
Input Voltage	AC120-347V
Operating Temp.	-4°F TO 122°F
IP Rating	IP30
0-10V Dimmable	YES
User-Tunable	-
Controls Compatible	YES
Dark Sky Compliant	-
Accessories	-
Options	-
Ordering Notes	Fits 7.4" min to 8.9" max diameters.

**CERTIFICATIONS**

**NZLED<sup>®</sup> 6158.2**

UL No.	E491844
Energy Star No.	CS23305



**SERIES PRODUCTS**

	NZLED <sup>®</sup> 6156	NZLED <sup>®</sup> 6258
		
Part Number	NZ-61564000	NZ-6258 4000
Description	15W 6" Down Light (120V)	25W 8" Down Light (120V)
Type	Retrofit	Retrofit
Applications	6 Inch Interior	8 Inch Interior
CCT	4000K	4000K
Input Power	15W	25W
Lumen Output	1050	1700
Certifications	Energy Star, UL 1598C	Energy Star, UL 1598C
Dimensions	7.32" x 4.69"	7.72" x 5.25"
Driver	NZUSA External	NZUSA External
Grounded	YES	YES
Housing Color	White	White
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC120V	AC120V
Operating Temp.	-4°F TO 122°F	-4°F TO 122°F
IP Rating	IP30	IP30
0-10V Dimmable	YES	-
User-Tunable	-	-
Controls Compatible	-	-
Dark Sky Compliant	-	-
Accessories	-	-
Options	-	-
Ordering Notes	Use only for 120V applications.	Use only for 120V applications.

**CERTIFICATIONS**

	NZLED <sup>®</sup> 6156	NZLED <sup>®</sup> 6258
UL No.	E491844	E491844
Energy Star No.	CS23305	CS23305





SERIES ACCESSORIES



	ACC 6000-R6	ACC 6000-R8
Part Number	6000-R6	6000-R8
Description	6" Goof Ring	8" Goof Ring
Fits Products	6166.3	6228.3
Ordering Notes	-	-



**SERIES PRODUCTS**

NZLED<sup>®</sup> 2750.2



NZLED<sup>®</sup> 4150-F



	NZLED <sup>®</sup> 2750.2	NZLED <sup>®</sup> 4150-F
Part Number	NZ-2750.6-CHDA1	4150-F
Description	50W CCT-Switchable Ground-Mount Flood Light	150W Multi-Mount Flood Light
Type	Replacement / New Construction	Replacement
Applications	Exterior Flood	Exterior Flood / Parking
CCT	3000K / 4000K / 5000K	5000K
Input Power	50W	150W
Lumen Output	7048	21000
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	10.2" x 8.5" x 2.1"	13.1" x 20.2" x 3.2"
Driver	Meanwell	Meanwell
Grounded	YES	YES
Housing Color	Brown	Brown
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 113°F	-4°F TO 113°F
IP Rating	IP65	IP65
0-10V Dimmable	-	YES
User-Tunable	CCT	-
Controls Compatible	-	-
Dark Sky Compliant	-	-
Accessories	-	4150-FM, 4000-TR, 4000-PC
Options	-	-
Ordering Notes	-	Includes 4150-FM Flood Mount

**CERTIFICATIONS**

	NZLED <sup>®</sup> 2750.2	NZLED <sup>®</sup> 4150-F
DLC Model No.	NZ-2750.6-CHDA1	NZ-4150.7WCT3B1-50
DLC ID	PLZUFZ1QI4E3	PLPHBRJY17T2
UL No.	E498108	E498108



**SERIES PRODUCTS**

NZLED<sup>®</sup> 4150.14

NZLED<sup>®</sup> 4300.14



Part Number	NZ-4150.14-BT3A1-abcdW50	NZ-4300.14-BT3A1-abcdWg
Description	150W Tunable Multi-Mount Area Light	300W Tunable Multi-Mount Area Light
Type	Replacement / New Construction	Replacement / New Construction
Applications	Exterior Flood / Parking	Exterior Flood / Parking
CCT	5000K	5000K
Input Power	Tunable 100-150W	Tunable 200-300W
Lumen Output	20697	41380
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	13.1" x 20.2" x 3.2"	13.1" x 27" x 3.5"
Driver	Meanwell	Meanwell
Grounded	YES	YES
Housing Color	Brown	Brown
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 113°F	-4°F TO 113°F
IP Rating	IP65	IP65
0-10V Dimmable	YES	YES
User-Tunable	Wattage	Wattage
Controls Compatible	-	-
Dark Sky Compliant	-	-
Accessories	4150-FM, 4000-TR, 4000-PC	4300-FM, 4000-TR, 4000-PC
Options	-	-
Ordering Notes	Includes AM/DM mount, others available separately	Includes AM/DM mount, others available separately


**CERTIFICATIONS**

	NZLED <sup>®</sup> 4150.14	NZLED <sup>®</sup> 4300.14
DLC Model No.	NZ-4150.14-BT3A1-abcdW50	NZ-4300.14-BT3A1-abcdWg
DLC ID	S-P2A3WS	S-7W6UQ1
UL No.	E498108	E498108



**SERIES PRODUCTS**

**NZLED<sup>®</sup> 4185.10**



Part Number	NZ-4185.10-50L01DM1
Description	Wattage-Switchable Area Light
Type	Replacement / New Construction
Applications	Exterior Flood / Parking
CCT	5000K
Input Power	150W / 185W / 200W
Lumen Output	19500 / 24050 / 26000
Certifications	DLC, ETL
Dimensions	13.1" x 27" x 3.5"
Driver	NZUSA
Grounded	YES
Housing Color	Brown
Warranty	5 Years
L70 Lifetime	>100K Hours
Input Voltage	AC100-277V
Operating Temp.	-4°F TO 113°F
IP Rating	IP65
0-10V Dimmable	YES
User-Tunable	-
Controls Compatible	-
Dark Sky Compliant	-
Accessories	-
Options	-
Ordering Notes	Includes 4185-DM mount.

**CERTIFICATIONS**

**NZLED<sup>®</sup> 4185.10**

DLC Model No.	NZ-4185.10-50L01DM1
DLC ID	S-DTBEZF
ETL No.	500786



**SERIES ACCESSORIES**

	ACC 4000-FM	ACC 4185-DM	ACC 4000-AM/DM
			
Part Number	NZ-4150/4200/4300-FM	NZ-4185-DM	NZ-4000-AM/DM
Description	Flood Light Mount	Area Light Direct Mount	Area Light Universal Arm / Direct Mount
Fits Products	4150.14, 4300.14	4185.10	4150.14, 4300.14
Ordering Notes	Included with 4150-F Flood Light	Included with 4185.10 Area Light	Included with 4150.14, 4300.14 Area Lights

	ACC 4000-TR	ACC 4000-PC
		
Part Number	NZ-4000-TR	NZ-4000-PC
Description	Area Light Trunnion Mount	Area Light / Flood Light Photo Cell
Fits Products	4150.14, 4300.14	4150.14, 4300.14
Ordering Notes	-	-



SERIES PRODUCTS

NZLED<sup>®</sup> 40260.7



NZLED<sup>®</sup> 8150.3



	NZLED <sup>®</sup> 40260.7	NZLED <sup>®</sup> 8150.3
Part Number	NZ-40260.7-XYDA1-abcde	NZ-8150.3JB-150WSAMA2-WH50
Description	Dual 3-Way Switching Parking Garage Light	150W Canopy Light
Type	Replacement	Replacement
Applications	Interior / Exterior	Interior / Exterior
CCT	Onboard 3-Way Switch: 3000K / 4000K / 5000K	5000K
Input Power	Onboard 3-Way Switch: 30W / 40W / 60W	150W
Lumen Output	7200-7800 / 8400-9000 / 7800-8400	15934
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	9.57" x 9.57" x 3.62"	14.96" x 14.96" x 2.83"
Driver	NetZero USA	NetZero USA
Grounded	YES	YES
Housing Color	White	White
Warranty	5 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC120-277V	AC100-277V
Operating Temp.	-40°F TO 122°F	-4°F TO 113°F
IP Rating	IP65 (Driver)	IP65
0-10V Dimmable	YES	-
User-Tunable	Dual Switching: CCT, Input Power	-
Controls Compatible	-	-
Dark Sky Compliant	-	-
Accessories	-	-
Options	-	-
Ordering Notes	-	-

CERTIFICATIONS

	NZLED <sup>®</sup> 40260.7	NZLED <sup>®</sup> 8150.3
DLC Model No.	NZ-40260.7-BSP1DA1-abc	NZ-8150 (5000K)
DLC ID	S-0TIEVH	PRDRLYWW
UL No.	E498108	E511648



SERIES PRODUCTS

NZLED<sup>®</sup> 4060M.5



NZLED<sup>®</sup> 4100M.5



	NZLED <sup>®</sup> 4060M.5	NZLED <sup>®</sup> 4100M.5
Part Number	NZ-4060M.5-HBSGDA1	NZ-4100M.5-DBSGDA1
Description	CCT Switchable 60W Wall Pack w/ Photocell	CCT Switchable 100W Wall Pack w/ Photocell
Type	New / Replacement	New / Replacement
Applications	Outdoor Luminaires: Mid Output	Outdoor Luminaires: High Output
CCT	Onboard 3-Way Switch: 3000K / 4000K / 5000K	Onboard 3-Way Switch: 3000K / 4000K / 5000K
Input Power	60W	100W
Lumen Output	8000 / 8700 / 8200	14400 / 15600 / 15000
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	14.37"W x 9.33"H x 7.36"D	14.37"W x 9.33"H x 7.36"D
Driver	NZUSA	NZUSA
Grounded	YES	YES
Housing Color	Brown	Brown
Warranty	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	120-277VAC	120-277VAC
Operating Temp.	-40°F TO 122°F, Sensor:-13°F TO 122°F, Emergency: 32°F TO 104°F	-40°F TO 122°F, Sensor:-13°F TO 122°F, Emergency: 32°F TO 104°F
IP Rating	IP65	IP65
0-10V Dimmable	YES	YES
User-Tunable	CCT - 3000K / 4000K / 5000K	CCT - 3000K / 4000K / 5000K
Controls Compatible	-	-
Dark Sky Compliant	-	-
Accessories	-	-
Options	-	-
Ordering Notes	-	-

CERTIFICATIONS

	NZLED <sup>®</sup> 4060M.5	NZLED <sup>®</sup> 4100M.5
DLC Model No.	NZ-4060M.5-HBSGDA1-abcefg	NZ-4100M.5-DBSGDA1-abce
DLC ID	PLWSP94R6FHI	PLRIBS7JS425
UL No.	E498108	E498108



**SERIES PRODUCTS**

NZLED<sup>®</sup> 4060.1-DS

NZLED<sup>®</sup> 4100.1-DS



	NZ-4060.1.DS-D4CYT3DA1	NZ-4100.1.DS-DSCYT3DA1
Part Number	NZ-4060.1.DS-D4CYT3DA1	NZ-4100.1.DS-DSCYT3DA1
Description	CCT Switchable 60W Full Cutoff Wall Pack w/ Photocell	CCT Switchable 100W Full Cutoff Wall Pack w/ Photocell
Type	Replacement / New Construction	Replacement / New Construction
Applications	Exterior Dark Sky	Exterior Dark Sky
CCT	Onboard 3-Way Switch: 3000K / 4000K / 5000K	Onboard 3-Way Switch: 3000K / 4000K / 5000K
Input Power	60W	100W
Lumen Output	7320 / 8640 / 7620	12500
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	14.17" x 9.25" x 6.54"	14.17" x 9.65" x 9.25"
Driver	NZUSA Internal	NZUSA Internal
Grounded	YES	YES
Housing Color	Brown	Brown
Warranty	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 113°F	-4°F TO 113°F
IP Rating	IP65	IP65
0-10V Dimmable	-	-
User-Tunable	CCT - 3000K / 4000K / 5000K	CCT - 3000K / 4000K / 5000K
Controls Compatible	-	-
Dark Sky Compliant	YES	YES
Accessories	-	-
Options	-	-
Ordering Notes	-	-

**CERTIFICATIONS**

	NZLED <sup>®</sup> 4060.1-DS	NZLED <sup>®</sup> 4100.1-DS
DLC Model No.	NZ-4060.1DS-D4CYT3DA1-abcdegh	NZ-4100.1DS
DLC ID	PLNS5ZB1GYAC	REGISTERED
UL No.	E498108	E498108





SERIES PRODUCTS

NZLED<sup>®</sup> 4020.2



NZLED<sup>®</sup> 4060.1-R



	NZLED <sup>®</sup> 4020.2	NZLED <sup>®</sup> 4060.1-R
Part Number	NZ-4020WBFA2-BRP50	NZ-4060.1.RW1CYT1DA2
Description	20W Mini Wall Pack w/ Photocell	CCT Switchable 60W Rotating Wall Pack
Type	Replacement / New Construction	Replacement / New Construction
Applications	Exterior	Exterior
CCT	5000K	Onboard 3-Way Switch: 3000K / 4000K / 5000K
Input Power	20W	60W
Lumen Output	2147	7200-7500
Certifications	DLC, UL 1598C	DLC, UL 1598C
Dimensions	8.58" x 5.79" x 2.91"	9.13" x 8.86" x 5.2"
Driver	NZUSA Internal	NZUSA Internal
Grounded	YES	YES
Housing Color	Brown	Brown
Warranty	7 Years	7 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 113°F	-4°F TO 113°F
IP Rating	IP65	IP61
0-10V Dimmable	-	-
User-Tunable	-	CCT - 3000K / 4000K / 5000K
Controls Compatible	-	-
Dark Sky Compliant	-	-
Accessories	-	-
Options	-	Photocell
Ordering Notes	-	-

CERTIFICATIONS

	NZLED <sup>®</sup> 4020.2	NZLED <sup>®</sup> 4060.1-R
DLC Model No.	NZ-4020WBFA2-a[Blank;P]50	NZ-4060.1R-W1CYT1DA2-abcef
DLC ID	PLK297T6M54H	PL1TWOLHQQ9P
UL No.	E498108	E498108



**SERIES PRODUCTS**

NZLED<sup>®</sup> 6009

NZLED<sup>®</sup> 6030



	NZLED <sup>®</sup> 6009	NZLED <sup>®</sup> 6030
Part Number	2373	2330
Description	9W E26/G24d Base Cobb Light	30W E39 Base Cobb Light
Type	Retrofit	Retrofit
Applications	Various Interior / Exterior	Various Interior / Exterior
CCT	5000K	5000K
Input Power	9W	30W
Lumen Output	1170	3400
Certifications	UL 1598C	UL 1598C
Dimensions	5.7" x 1.77"	9.06" x 3.66"
Driver	NetZero USA	NetZero USA
Grounded	YES	YES
Housing Color	-	-
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 113°F	-4°F TO 113°F
IP Rating	IP64	IP64
0-10V Dimmable	-	-
User-Tunable	-	-
Controls Compatible	-	-
Dark Sky Compliant	-	-
Accessories	-	-
Options	E26 or G24d base options.	-
Ordering Notes	-	-

**CERTIFICATIONS**

	NZLED <sup>®</sup> 6009	NZLED <sup>®</sup> 6030
UL No.	E491906	E491906



**SERIES PRODUCTS**

NZLED<sup>®</sup> 6080

NZLED<sup>®</sup> 6100



	80w E39	100w E39
Part Number	80w E39	100w E39
Description	80W E39 Base Cobb Light	100W E39 Base Cobb Light
Type	Retrofit	Retrofit
Applications	Various Interior / Exterior	Various Interior / Exterior
CCT	5000K	5000K
Input Power	80W	100W
Lumen Output	9400	11600
Certifications	UL 1598C	UL 1598C
Dimensions	9.06" x 3.66"	9.06" x 3.66"
Driver	NetZero USA	NetZero USA
Grounded	YES	YES
Housing Color	-	-
Warranty	5 Years	5 Years
L70 Lifetime	>100K Hours	>100K Hours
Input Voltage	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 113°F	-4°F TO 113°F
IP Rating	IP64	IP64
0-10V Dimmable	-	-
User-Tunable	-	-
Controls Compatible	-	-
Dark Sky Compliant	-	-
Accessories	-	-
Options	-	-
Ordering Notes	-	-

**CERTIFICATIONS**

	NZLED <sup>®</sup> 6080	NZLED <sup>®</sup> 6100
UL No.	E491906	E491906



**SERIES PRODUCTS**



	NZLED <sup>®</sup> 9035	NZLED <sup>®</sup> 9080	NZLED <sup>®</sup> 9120
Part Number	NZ-9035	NZ-9080	NZ-9120
Description	35W HID Retrofit	80W HID Retrofit	120W HID Retrofit
Type	Retrofit	Retrofit	Retrofit
Applications	High Bay, Parking, Flood, Wallpack	High Bay, Parking, Flood, Wallpack	High Bay, Parking, Flood, Wallpack
CCT	5000K	5000K	5000K
Input Power	35W	80W	120W
Lumen Output	3629	8963	13690
Certifications	DLC, UL 1598C	DLC, UL 1598C	DLC, UL 1598C
Dimensions	(7.09-8.27)" x 5.2" x 5.12"	(9.25-11.22)" x 6.3" x (5.12-5.9)"	(9.25-11.22)" x 6.3" x (5.12-5.9)"
Driver	NZUSA External	NZUSA External	NZUSA External
Grounded	YES	YES	YES
Housing Color	-	-	-
Warranty	7 Years	7 Years	7 Years
L70 Lifetime	>100K Hrs	>100K Hrs	>100K Hrs
Input Voltage	AC100-277V	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 131°F	-4°F TO 131°F	-4°F TO 131°F
IP Rating	IP40	IP40	IP40
0-10V Dimmable	-	-	-
User-Tunable	-	-	-
Controls Compatible	-	-	-
Dark Sky Compliant	-	-	-
Accessories	-	-	-
Options	-	-	-
Ordering Notes	-	-	-

**CERTIFICATIONS**

	NZLED <sup>®</sup> 9035	NZLED <sup>®</sup> 9080	NZLED <sup>®</sup> 9120
DLC Model No.	NZ-9035 (5000K)	NZ-9080 (5000K)	NZ-9120 (5000K)
DLC ID	P8PB4C36	PMFX6W2X, PSHT5HAV	P676FDA3, PZHW48Z
UL No.	E491905	E491905	E491905



**SERIES PRODUCTS**



	NZLED <sup>®</sup> 9150	NZLED <sup>®</sup> 9200	NZLED <sup>®</sup> 9300.2
Part Number	NZ-9150	NZ-9200	NZ-93005U
Description	150W HID Retrofit	200W HID Retrofit	300W HID Retrofit
Type	Retrofit	Retrofit	Retrofit
Applications	High Bay, Parking, Flood, Wallpack	High Bay, Parking, Flood, Wallpack	High Bay, Parking, Flood, Wallpack
CCT	5000K	5000K	5000K
Input Power	150W	200W	300W
Lumen Output	16790	22850	32390
Certifications	DLC, UL 1598C	DLC, UL 1598C	DLC, UL 1598C
Dimensions	(12.8-13.98)" x 7.17" x (5.12-6.3)"	(12.8-13.98)" x 7.17" x (5.12-6.3)"	(14.96-17.52)" x 10.24" x (5.12-6.3)"
Driver	NZUSA External	NZUSA External	NZUSA External
Grounded	YES	YES	YES
Housing Color	-	-	-
Warranty	7 Years	7 Years	7 Years
L70 Lifetime	>100K Hrs	>100K Hrs	>100K Hrs
Input Voltage	AC100-277V	AC100-277V	AC100-277V
Operating Temp.	-4°F TO 131°F	-4°F TO 131°F	-4°F TO 131°F
IP Rating	IP40	IP40	IP40
0-10V Dimmable	-	-	-
User-Tunable	-	-	-
Controls Compatible	-	-	-
Dark Sky Compliant	-	-	-
Accessories	-	-	-
Options	-	-	-
Ordering Notes	-	-	-

**CERTIFICATIONS**

	NZLED <sup>®</sup> 9150	NZLED <sup>®</sup> 9200	NZLED <sup>®</sup> 9300.2
DLC Model No.	NZ-9150 (5000K)	NZ-9200 (5000K)	-
DLC ID	PR81FYDX, P5QRB38C	PVQMWS7X, PSUMAH7K	-
UL No.	E491905	E491905	E491906



**SERIES PRODUCTS**

NZLED<sup>®</sup> 5008



NZLED<sup>®</sup> 7001.1



	NZLED <sup>®</sup> 5008	NZLED <sup>®</sup> 7001.1
Part Number	5008	7001.1
Description	Wall Mount Occupancy Sensor	Wall Switch Dimmer
Type	Wall Mounted	Wall Mounted
Applications	Interior	Interior
CCT	-	-
Certifications	ETL	UL
Dimensions	-	-
Driver	-	-
Grounded	-	-
Housing Color	-	-
Warranty	3 Years	3 Years
L70 Lifetime	-	-
Lumen Output	-	-
Input Power	-	-
Input Voltage	-	-
Operating Temp.	-	-
IP Rating	-	-
0-10V Dimmable	-	-
User-Tunable	-	-
Controls Compatible	-	-
Dark Sky Compliant	-	-
Accessories	-	-
Ordering Notes	-	-

**CERTIFICATIONS**

	NZLED <sup>®</sup> 5008	NZLED <sup>®</sup> 7001.1
DLC Model No.	-	-
DLC ID	-	-
UL No.	-	✓
ETL No.	✓	-
Energy Star No.	-	-



**SERIES PRODUCTS**

NZLED<sup>®</sup> 9001



NZLED<sup>®</sup> 9001



	NZLED <sup>®</sup> 9001	NZLED <sup>®</sup> 9002
Part Number	9001	9002
Description	Parallel Surge Suppression 120-347V	Parallel Surge Suppression 480V
Type	Surge Suppression	Surge Suppression
Applications	Interior / Exterior	Interior / Exterior
CCT	–	–
Certifications	UL	UL
Dimensions	–	–
Driver	–	–
Grounded	–	–
Housing Color	–	–
Warranty	3 Years	3 Years
L70 Lifetime	–	–
Lumen Output	–	–
Input Power	–	–
Input Voltage	–	–
Operating Temp.	–	–
IP Rating	–	–
0-10V Dimmable	–	–
User-Tunable	–	–
Controls Compatible	–	–
Dark Sky Compliant	–	–
Accessories	–	–
Ordering Notes	–	–

**CERTIFICATIONS**

	NZLED <sup>®</sup> 9001	NZLED <sup>®</sup> 9001
DLC Model No.	–	–
DLC ID	–	–
UL No.	✓	✓
ETL No.	–	–
Energy Star No.	–	–



**SERIES PRODUCTS**

NZLED<sup>®</sup> 4827

NZLED<sup>®</sup> 4827-38



	NZLED <sup>®</sup> 4827	NZLED <sup>®</sup> 4827-38
Part Number	4827	4827.38
Description	250W 480V to 277V Step Down Transformer	380W 480V to 277V Step Down Transformer
Type	Transformer	Transformer
Applications	Interior / Exterior	Interior / Exterior
CCT	–	–
Certifications	UL	UL
Dimensions	–	–
Driver	–	–
Grounded	–	–
Housing Color	–	–
Warranty	3 Years	3 Years
L70 Lifetime	–	–
Lumen Output	–	–
Input Power	–	–
Input Voltage	–	–
Operating Temp.	–	–
IP Rating	–	–
0-10V Dimmable	–	–
User-Tunable	–	–
Controls Compatible	–	–
Dark Sky Compliant	–	–
Accessories	–	–
Ordering Notes	–	–

**CERTIFICATIONS**

	NZLED <sup>®</sup> 4827	NZLED <sup>®</sup> 4827-38
DLC Model No.	–	–
DLC ID	–	–
UL No.	✓	✓
ETL No.	–	–
Energy Star No.	–	–





**SERIES PRODUCTS**



	NZLED <sup>®</sup> 9111-8.3	NZLED <sup>®</sup> 9111-12	NZLED <sup>®</sup> 9111-25H
Part Number	9111.8.3	9111.12	9111.25H
Description	8W Troffer Emergency Battery Pack	12W High Bay / HID Emergency Battery Pack	25W Down Light Emergency Battery Pack
Type	Battery	Battery	Battery
Applications	Interior	Interior	Interior
CCT	–	–	–
Certifications	ETL	ETL	ETL
Dimensions	–	–	–
Driver	–	–	–
Grounded	YES	YES	YES
Housing Color	–	–	–
Warranty	5 Years	5 Years	5 Years
L70 Lifetime	–	–	–
Lumen Output	–	–	–
Wattage	8W	12W	25W
Input Voltage	AC120-277V	AC120-277V	AC120-277V
Operating Temp.	>122°F	>122°F	>122°F
IP Rating	–	–	–
0-10V Dimmable	–	–	–
User-Tunable	–	–	–
Controls Compatible	–	–	–
Dark Sky Compliant	–	–	–
Accessories	–	–	–
Ordering Notes	–	–	–

**CERTIFICATIONS**

	NZLED <sup>®</sup> 9111-8.3	NZLED <sup>®</sup> 9111-12	NZLED <sup>®</sup> 9111-25H
DLC Model No.	–	–	–
DLC ID	–	–	–
UL No.	–	–	–
ETL No.	✓	✓	✓
Energy Star No.	–	–	–



SERIES PRODUCTS



	NZLED <sup>®</sup> 9008.1	NZLED <sup>®</sup> 9010.1	NZLED <sup>®</sup> 9006.1
Part Number	9008.1	9010.1	9006.1
Description	LED Exit Sign	LED Dual-Head Exit Emergency Combo	LED Dual-Head Emergency Light
Type	Replacement	Replacement	Replacement
Applications	Interior	Interior	Interior
CCT	–	–	–
Certifications	UL	UL	UL
Dimensions	–	–	–
Driver	–	–	–
Grounded	YES	YES	YES
Housing Color	White w/ Red Letters	White w/ Red Letters	White
Warranty	5 Years	5 Years	5 Years
L70 Lifetime	–	–	–
Lumen Output	–	–	–
Input Power	–	–	–
Input Voltage	AC120-277V	AC120-277V	AC120-277V
Operating Temp.	68°F TO 86°F	68°F TO 86°F	68°F TO 86°F
IP Rating	UL Listed for damp locations (0°C – 50°C)	UL Listed for damp locations (0°C – 40°C)	UL Listed for damp locations (0°C – 50°C)
Battery	3.6V long life, maintenance-free, rechargeable NiCd battery	9.6V long life, maintenance-free, rechargeable NiCd battery	3.6V long life, maintenance-free, rechargeable NiCd battery
Backup Time	Minimum 90-minute emergency illumination	Minimum 90-minute emergency illumination	Minimum 90-minute emergency illumination
Controls Compatible	–	–	–
Dark Sky Compliant	–	–	–
Options	SDT: Self-diagnostic feature performs monthly, bi-annual, and annual tests to ensure reliable operation and meet electrical and life safety codes.	SDT: Self-diagnostic feature performs monthly, bi-annual, and annual tests to ensure reliable operation and meet electrical and life safety codes.	SDT: Self-diagnostic feature performs monthly, bi-annual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
Ordering Notes	White with green lettering available by special order. SDT self-diagnostic feature available by special order.	SDT self-diagnostic feature available by special order.	SDT self-diagnostic feature available by special order.

CERTIFICATIONS

	NZLED <sup>®</sup> 9008.1	NZLED <sup>®</sup> 9010.1	NZLED <sup>®</sup> 9006.1
DLC Model No.	–	–	–
DLC ID	–	–	–
UL No.	✓	✓	✓
ETL No.	–	–	–
Energy Star No.	–	–	–



SERIES PRODUCTS

NZGUV<sup>®</sup> UR-140



Description	Germicidal 253.7 Non-Ionizing UV-C Upper-room Unit
Type	Disinfecting Luminaire
EPA Registration	Reg. No. 98440-DV-2, EST. No. 98440-GA-1
UV-C Wavelength	253.7 nm
Actinic Irradiance	16.8 mJ / m <sup>2</sup> per second at 200mm
Beam Angle	180° Horizontally, 35° Vertically
Input Voltage	120V 50/60Hz
Dimensions	48" W x 5" H x 8.6875" D
Weight	10 lbs
Operating Temp.	23°F TO 100°F
Power Cord	Hard-wired
Lamps	(1x) NetZero USA <sup>®</sup> 36W 253.7 nm quartz germicidal high intensity UVC lamp with aluminum end caps and G13 sockets
Housing	Lightweight aluminum with highly reflective interior for increased germicidal intensity
Warranty	5 Years (excluding bulbs)
UL File No.	E517407
On/Off Safety Switch	YES

PRODUCT APPROVALS

	NZGUV <sup>®</sup> UR-140
UL Safety Tested & Certified	✓
EPA Registered	✓
UL 153 Compliant	✓
CSA C22.2 #2520.4 Compliant	✓
Mil-Spec 461F	✓
RoHS Compliant, BAA Compliant	✓
FCC Compliant, Part 15 Class A	✓



SERIES PRODUCTS

NZGUV<sup>®</sup> UVC-T8-17

NZGUV<sup>®</sup> UVC-T8-36



Description	2 ft 17W 253.7 nm quartz UV-C lamp	4 ft 36W 253.7 nm quartz UV-C lamp
Width	589mm	1199mm
Rated Power	17W	36W
Irradiation Intensity (uW/c m <sup>2</sup> )	≥75	≥120
Current	280 mA	330 mA
Tube Voltage	94-104V	110-130V
Irradiation Intensity Duration - 1000h	≥88%	≥88%
Irradiation Intensity Duration - 2000h	≥82%	≥82%
Irradiation Intensity Duration - 5000h	≥70%	≥70%
Irradiation Intensity Duration - 8000h	≥50%	≥50%
Wavelength	253.7 nm	253.7 nm
Average Lifetime	≥9000 hours	≥9000 hours
Switching Life - ON/OFF: 45S/15S	Average>8000 / Single tube>6000. No black end in 1000 times.	Average>8000 / Single tube>6000. No black end in 1000 times.
Low Voltage Lifetime	Below 120V: More than 1000 hours lifetime, no black end in 300 hours.	Below 120V: More than 1000 hours lifetime, no black end in 300 hours.
Filament Type	9711	9711
Filament Cold Resistance	2.5±10% Ω	2.5±10% Ω
High Purity Mercury (99.9999%)	15mg	25mg
Aluminum Socket	G13	G13
Diameter (mm)	24.5+ -0.5mm T8	24.5+ -0.5mm T8
Tube Material	Quartz glass, hydroxy≤10, Non-Ozone	Quartz glass, hydroxy≤10, Non-Ozone



<b>Sales Support</b>		<i>Mark Sennett</i>	mark.sennett@netzero-usa.com
		<i>Danny Broadway</i>	danny.broadway@netzero-usa.com
<b>Product Orders</b>		<i>Submit to:</i>	orders@netzero-usa.com
<b>Product Support</b>	Marketing	<i>Anthony Meeks</i>	anthony.meeks@netzero-usa.com
	Account Management	<i>Laura Kaufenberg</i>	laura@netzero-usa.com
	Technical & Installation	<i>Jeffery Bell</i>	jeffb@netzero-usa.com
<b>Operations Support</b>	Operations	<i>Steven Hardy</i>	steven.hardy@netzero-usa.com
	Financing	<i>Amanda Howard</i>	amanda@netzero-usa.com
	Product RMA / Warranty	<i>Svetlana Zhavoronkova</i>	svetlana.z@netzero-usa.com
	Inventory, Shipping, Order Tracking	<i>Chip Amann</i>	chip@netzero-usa.com